


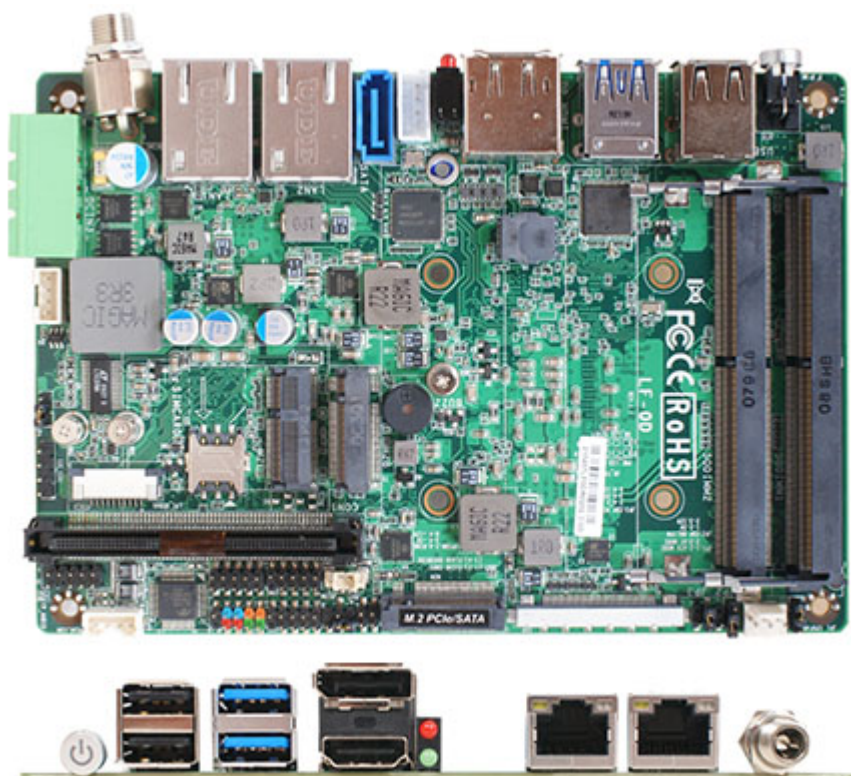

298.00 EUR

incl. 19% VAT, plus [shipping](#)

- Intel Comet Lake-U !
- 3,5" Form Factor !
- PCIe 4.0 !

Support:  [Datasheet](#)

- Intel® 10th Gen Comet Lake Celeron 5205U 1.9GHz/DC Core MCP Processor
- 2* DDR4 2400MHz, up to 64GB
- 1* Intel® I219LM GbE, 1* Intel® i211AT GbE
- 1* SATA III (6Gb/s), 1* M.2 (M-key), 1* M.2 E-key Support CNVi, 1* M.2 B-key Support 4G/5G Module
- 1* HDMI/DP + 1* eDP
- 2* RS232/422/485, 2* USB3.0, 3* USB2.0
- 12~36V DC in
- 3.5" Form Factor (146 * 102 mm)
- JLF0D-E2 support TPM2.0 (option)

Model	– JLF0D-E0 – JLF0D-E2 (TPM2.0)
Form Factor	– 3.5" (146 * 102mm)
Processor System	– Intel® 10th Gen Comet lake Celeron 5205U Dual Core MCP Processor, 1.9GHz, 15W – Intel SoC chipset – AMI 128Mb Flash ROM BIOS
Expansion Slot	– 1* M.2 E-key (2230,Support CNVi) – 1* M.2 B-key (3042/3052,Support 4G/5G Module) – 1* SIM Card Holder (Nano)
Memory	– 2* DDR4 2400MHz DRAM SO-DIMM up to 64GB

Graphics	– Intel® HD Graphics, shared memory – 1* HDMI 1.4 (Max Resolution : 4096×2304@24Hz) – 1* DP (Max Resolution : 4096×2304@60Hz) – 1* eDP (Max Resolution : 4096×2304@60Hz) – Support Triple Displays
Ethernet	– 1* Intel® i219LM GbE – 1* Intel® i211AT GbE
Audio	– USB Audio – 3W AMP speaker
Storage	– 1* M.2 M-key (2242/2280, SATA or NVMe-PCI-Ex4) – 1* SATAIII
Rear I/O	– 1* HDMI – 1* DP – 2* RJ45 Ethernet – 2* USB3.0 – 2* USB2.0 – Power button – 12~36V DC-in jack
Internal I/O	– 1* USB2.0 – 2* RS232/422/485 – 1* SATAIII (6.0Gb/s) – 3* M.2 (M-key, E-key, B-key) – 1* GPIO (8 bit, 5V) – 1* AT mode – 1* I2C/SMBUS – 1* FP_Audio – 1* Speaker – JLF0D-E2 support TPM2.0 (Option)
Watchdog Timer	– From Super I/O to drag RESETCON# – 256 segments (10sec ~ 255min)
Power	DC-in 12~36V, AT/ATX Supported – AT: Directly PWR on as Power input ready – ATX: Press Button to PWR on after Power input ready
Compliance	– CE, FCC, RoHS, REACH
Temperature	– Operating: 0°C ~ 60°C – Storage: -20°C ~ 70°C – Humidity: 10% ~ 90% RH @40°C (non-condensing)
OS Support	– Windows 10, Linux